Door Pull Handle Installation Instruction Sheet

DA-113(Pull Handle)

%Please read the installation instruction before installation. Please do not dispose of the installation sheet after installation, instead please pass it to the product user for safe keeping


Safety Warning

Before installation, please read the "Safety Warning" to ensure proper installation of product.

in the events of installation the possible situations that may occur leading to harm of the user will be stated below.







△警告 About Installation

Please do not install products on non-reinforced walls. Risk of product dropping may occur, resulting in injuries.

- *Please ensure that product is not installed on hollow wall structure before installation
- Corresponding door thickness for this product is listed in the product specification section below.

After installation, please check product once more to make sure product has been firmly secured.

If product is not installed firmly, product might wobble or there might be risk of product falling off, resulting in injuries

NPlease do not use product for unintended purposes or application. Product failure may result in injuries.

NLoad heavier than the stated load capacity may result in product failure and possible risk of injuries


OPlease do not subject product to load capacity and impact force larger than what is stated. Product failure may occur, increasing the risk of injuries.

▲注意 About Product Maintenance

Wipe away all stains of cosmetics and medicinal products when found. Leaving stains for long term on the product may result in color change or corrosion which will increase the risk of product breakage and injuries

For maintenance on the leather portion of the door, please read the "Leather–Wrapped Product Manual" provided seperately. As for the metal portions of the door handle for wipe with a soft, dry cloth for maintenance and when necessary a damp cloth with mild detergent(5–10% dilution) and finish off with a soft, dry cloth, Please avoid Gasoline(Benzin), thinner, alcohol and acidic or alkali-based detergent and cleansers to clean the products.

Product Specification

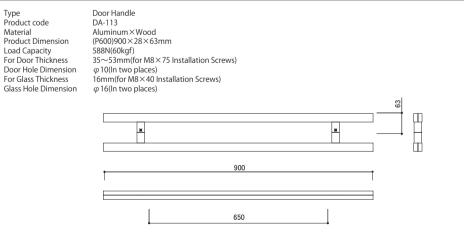



Installation Procedure

◎Installation Procedure

①Remove the assembly screws and M6×75 installation screws from the pull handle and separate Main Body A and B of the pull handle from the connector

②Align Main Body B and Main Boday A with the installation hole on the door and fix them in place with the M8×75 installation screws and washers provided(For glass door installation, please insert the rubber tubes into the ϕ 16 hole opening and fix the Main Body B and Connector in place with the M8×40 installation screws and washers provided) ③Cover the connector with Main Body A side of the pull handle and secure it in place with the assembly screws

