DA-153(Pull Handle)

*Please read the installation instruction before installation. Please do not dispose of the installation sheet after installation, instead please pass it to the product user for safe keeping

Safety Warning

Before installation, please read the "Safety Warning" to ensure proper installation of product.

■ in the events of installation the possible situations that may occur leading to harm of the user will be stated below.



Column with the following tag indicates content that may lead to risks of death or serious injuries



Column with the following tag indicates content that may lead to injuries and product damage



This tag indicates content that should be avoided



Please carry out all actions with the following tag.

⚠警告 About Installation

Please do not install products on non-reinforced walls. Risk of product dropping may occur, resulting in injuries.

XPlease ensure that product is not installed on hollow wall structure before installation

**Corresponding door thickness for this product is listed in the product specification section below.




After installation, please check product once more to make sure product has been firmly secured.

If product is not installed firmly, product might wobble or there might be risk of product falling off, resulting in injuries

△警告 About Product Usage


Please do not use product for unintended purposes or application. Product failure may result in injuries.



Please do not subject product to load capacity and impact force larger than what is stated. Product failure may occur, increasing the risk of injuries.

△注意 About Product Maintenance

Wipe away all stains of cosmetics and medicinal products when found. Leaving stains for long term on the product may result in color change or corrosion which will increase the risk of product breakage and injuries



Product Specification

Door Handle Product code DA-153 Material


Aluminum, Brass, Ceramin (P650)900×25×60mm **Product Dimension** 588N(60kgf) **Load Capacity**

For Door Thickness 35~45mm(for M6×75 Installation Screws)


Door Hole Dimension φ 8(In two places)

For Glass Thickness 8-12mm(for M6×40 Installation Screws)

Glass Hole Dimension

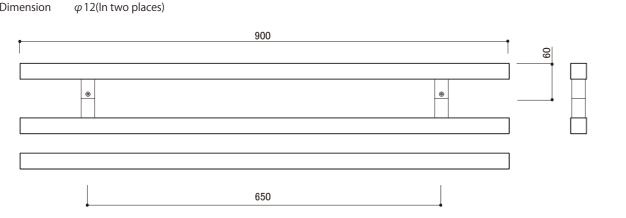

Included in Package (Please check)





Instruction x1





Rubber Tube x2 (For Glass)

 $M6 \times 75$

Installation Screw x2

Installation Procedure

- ①Remove the Assembly Screws and M6×40 Installation Screws from the pull handle and separate Main Body A and B of the pull handle
- 2Align Main Body A and Main Body B with the installation hole on the door and fix them in place with the M6 \times 75 Installation Screws and Spring Washers provided
- (For glass door installation, please insert the rubber tubes into the φ 12 hole opening and
- fix the Main Body B and Pedestal in place with the M6×40 Installation Screws and Spring Washers provided)
- 3 Cover the Pedestal with Main Body A side of the pull handle and secure it in place with the Assembly Screws

