
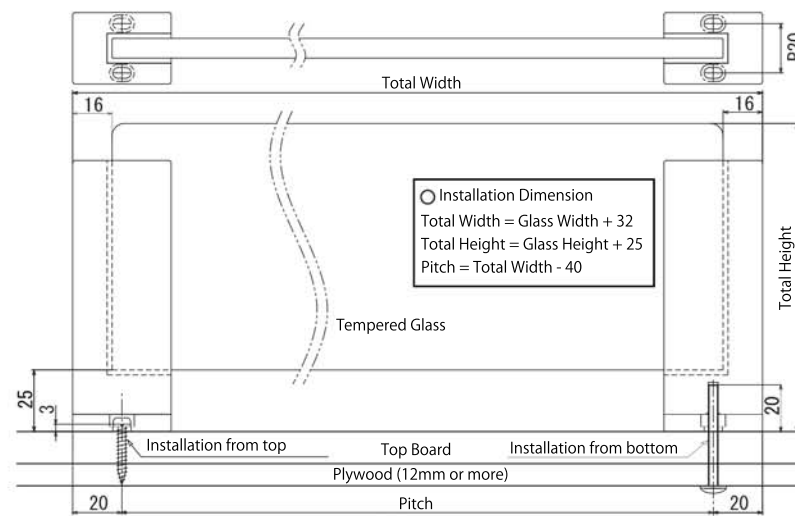


Kitchen Divider Installation Instruction Sheet

KC-038

- * Please note that the provided Installation Screws may not be suitable for all sites. If the provided Installation Screws cannot be installed, user will have to source for a suitable screw themselves.
- * Please be sure to read before installing product.
- * Do not dispose the installation sheet after installation, instead please pass it to the product user.

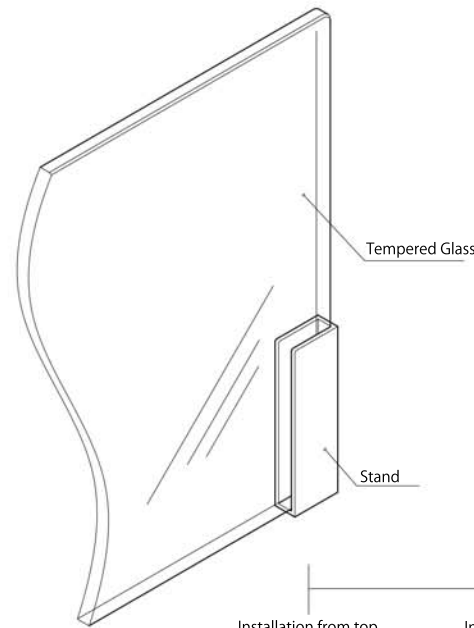

⚠ Caution: About installation

- * Install product on Top Board that is at least 12mm thick.
- ** Do not install on hollow boards.
- * Installation hole dimensions should not be bigger than $\varnothing 5$ to prevent Pedestal from protruding.
- * If installing near items that emit heat, please check the minimum distance needed between item and this product.
- * After installation, please check to ensure product has been securely installed.
- * Glass thickness is 8mm. For safety reasons, glass dimensions cannot be bigger than H300 x W1000.
- * As there may be some minimal difference for every glass, please open pilot holes after product is on site.

⊙ Installation Procedure (From Top)


1. Install Pedestal to Top Board using the Spring Washers and Installation Screw A.
2. Place Main Body on top of Pedestal and secure with Spring Washer and Connecting Screw.
3. Slide glass into the side of Stand.
4. Insert Stand into Main Body.

⊙ Installation Procedure (From Bottom)

1. Place Main Body on top of Pedestal and secure with Spring Washer and Connecting Screw.
2. Install Pedestal to Top Board from the bottom using the provided Spring Washers and Installation Screw B.
3. Slide glass into the side of Stand.
4. Insert Stand into Main Body.


⚠ Caution: About product usage

- * User is able to remove glass whenever they want to by sliding glass panel upwards. Please handle glass carefully.
- * The load capacity for this product is 5kgf, Do not load heavier than the stated load capacity.
- * Do not use product for unintended purpose or application. Product failure may result in injury.
- * Do not use gasoline (Benzene), thinner, alcohol, acidic/alkaline based detergent and/or cleanser to clean the product.



Installation Screw A (Installation from top)
Length: Top Board thickness + Plywood thickness + 3mm
Contents: $\varnothing 4 \times 30$ Metal Sheet Philip Screw

Installation Screw B (Installation from bottom)
Length: Top Board thickness + Plywood thickness + 20mm
Contents: M4 x 40 Metal Sheet Philip Truss Screw

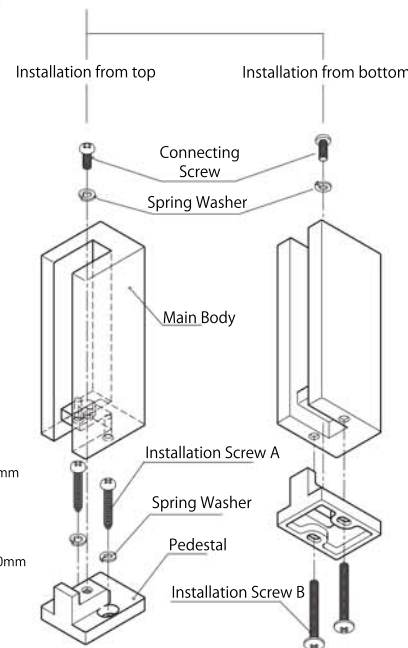

- * If it is difficult to slide glass into Stand, wipe glass with a wet cloth and slide it in.
- * Please note that it is not possible to change the installation position for bottom installation. Please allow some allowance when calculating pitch.

KAWAJUN
www.kawajun.co.jp

NO. 010