

## Door Handle Installation Instruction Sheet

# DH-752

\* Please be sure to read before installing product.

\* Do not dispose the installation sheet after installation, instead please pass it to the product user.

### ◎ Installation Procedure


1. Drill two  $\varnothing 9$  holes with pitch 100mm.
2. Install Handle A to door by fixing Pedestal, Spring Washers, and Installation Screws on the other side of the door.
3. Fix Handle B onto Pedestal and secure with Fixing Screws.

### ⚠ Caution: About installation

- \* This product can be installed on doors 28~40mm thick.
- \* Do not install product on ALC (Autoclaved lightweight concrete), lightweight metal, or spaces between concrete blocks.
- \* After installation, please check to ensure product has been installed properly. If product has not been installed properly, it may wobble and drop off.
- \* Do not install product in areas with very high temperature. It may damage the product and cause it drop off.

### ⚠ Caution: About product usage

- \* Do not use product for unintended purpose or application. Product failure may result in injury.
- \* Do not use gasoline (Benzene), thinner, alcohol, or acidic/alkaline based detergent and/or cleanser to clean the product.

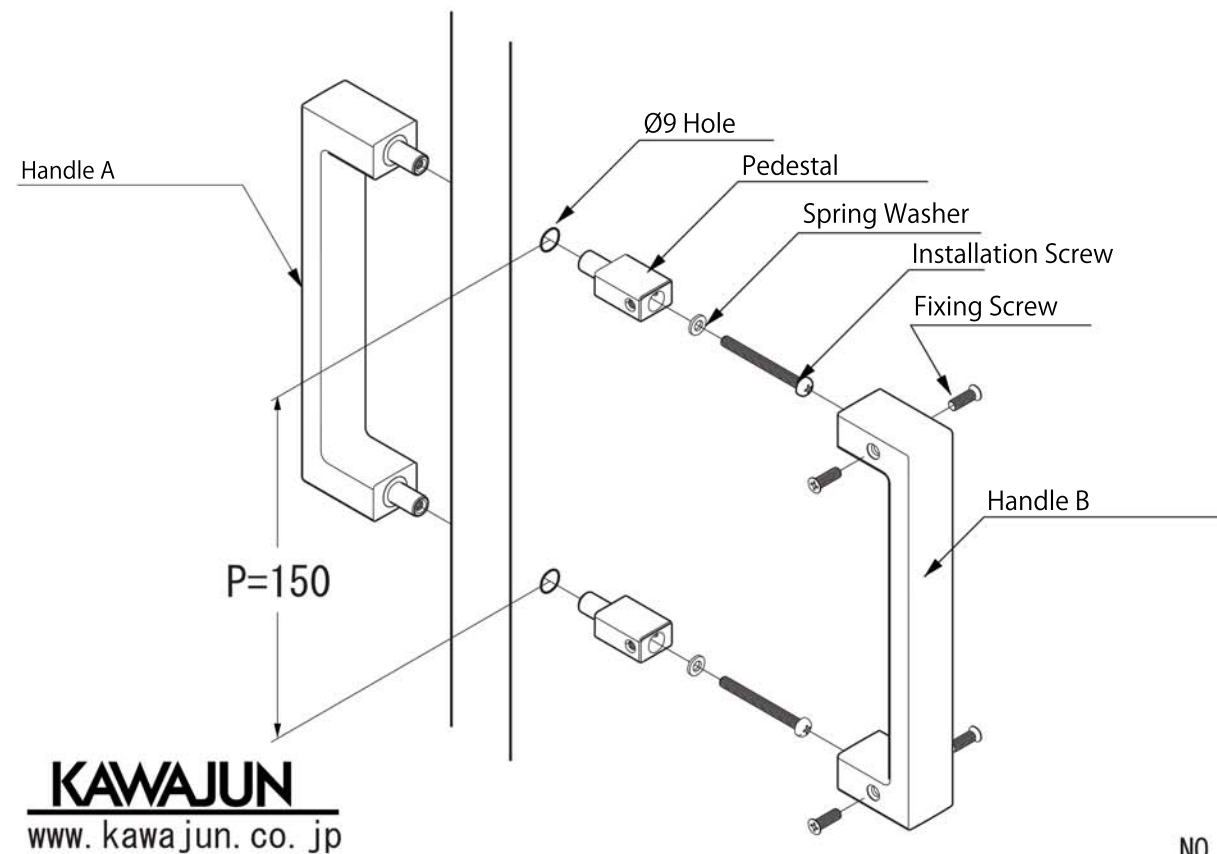

**KAWAJUN**  
www.kawajun.co.jp

NO. 003