

## Grab Bar Installation Instruction Sheet

# KH-54

\* Please be sure to read before installing product.

\* Do not dispose the installation sheet after installation, instead please pass it to the product user.

### ⚠ Caution: About installation

\* If installing on plaster boards, please ensure it is at least 12mm thick.  
\*\* Do not install product on non-reinforced walls.

\* Do not install on ALc or in spaces between concrete blocks.

\* After installation, please check to ensure product has been securely installed.

\* This product is for indoor usage only. As it is not waterproof, please do not install it outdoor or in places that has a high humidity level. It may lead to corrosion and result in parts falling out and causing injury.

### ⚠ Caution: About product usage


\* Load capacity for this product is 60kgf. Do not load heavier than the stated load capacity. Product failure may result in injury.

\* Do not use product for unintended purpose or application. Product failure may result in injury.

\* Do not use gasoline (Benzene), thinner, alcohol, or acidic/alkaline based detergent and/or cleanser to clean the product.

### 🕒 Installation Procedure

1. Secure Grab Bar to L-angle to wall using Grab Bar Fixing Screw.
2. Install Main Body and L-angle to wall using the provided Spring Washers and Installation Screws.
3. Secure Cover to Main Body with Cover Fixing Screws.

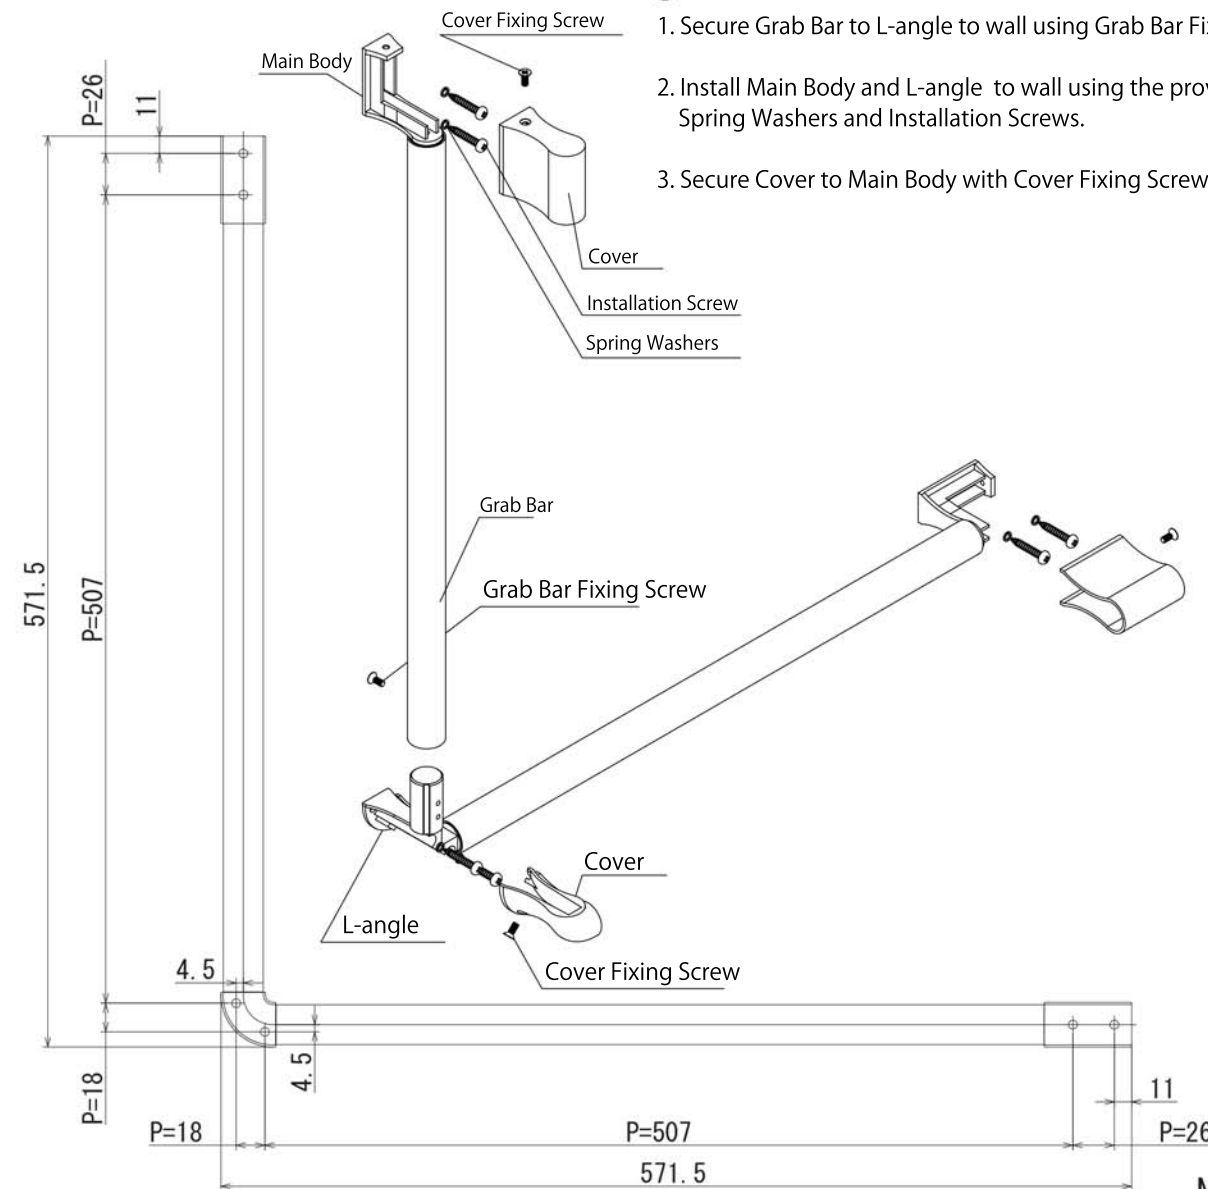

**KAWAJUN**

NO. 001