#### Shelf Installation Instruction Sheet

# SC-294S

- \* Please be sure to read before installing product.
- \* Do not dispose the installation sheet after installation, instead please pass it to the product user.

Ensure Groove is located at the bottom for Main Body while [Surface] Company Logo is facing up for Cover. 80 Arcylic Shelf

Main Body

Groove for minus screwdriver head

Spring Washer

Main Body Fixing Screw

#### O Installation Procedure


- 1. Install Main Body to wall using the provided Spring Washers and Main Body Fixing Screws.
- \* Adjust Main Body's angle before tightening screw.
- 2. Clasp Cover to Main Body.
- \* Ensure all claws are hooked properly onto Main Body.
- 3. Fix Shelf on top of Main Body.

### ▲ Caution: About installation

- \* If product is to be installed on boards, please ensue it is at least 12mm thick. \*\* Do not install on non-reinforced walls.
- \* Do not install product on ALC or in spaces between concrete blocks.
- \* After installation, please check to ensure product has been installed properly. If product has not been installed properly, it may wobble and drop off.
- \* Avoid direct contact with water. Do not install product in areas with very high temperature. It may damage the product and cause it to drop off.

## ⚠ Caution: About product usage

- \* The load capacity of Main Body 10kgf. The load capacity of shelf is 3kgf. Do not load heavier than the stated load capacity. Product failure may result in injury.
- \* Shelf is made of Acrylic. Applying heat of 60°C and above will cause it to melt/warp.
- \* Do not use product for unintended purpose or application. Product failure may result in injury.
- \* Do not use gasoline (Benzene), thinner, alcohol, acidic/alkalin based detergent and/or cleanser to clean the product.

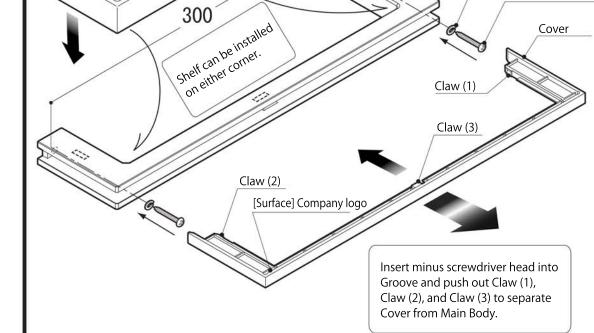

**KAWAJUN** www.kawajun.co.jp

NO. 002